




EZ KLEEN[®]
METAL MESH AIR FILTERS

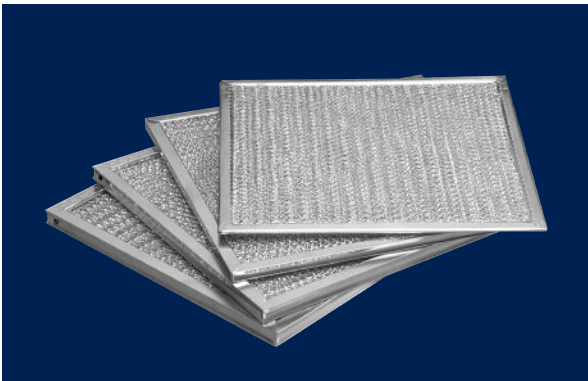

PERFORMANCE DATA

Air Filter	Stock Size (H x W x D) Nominal	Stock No.	Performance		
EZ KLEEN UL 900 Classified Rated Velocity 150-650 FPM (0.76-3.31 m/s) Optimum Velocity 350-520 FPM (1.78-2.64 m/s)			1" EZ Klean Filters		
	20" x 25" x 1"	9801	1" (25mm) & 3/32" (2.4mm)	At 350 fpm (1.78 m/s)	At 520 fpm (2.64 m/s)
	20" x 20" x 1"	9802			
	16" x 25" x 1"	9803	Average Arrestance	54%	48%
	16" x 20" x 1"	9804	Clean Resistance	0.045" w.c. 0.011 kPa	0.09" w.c. 0.023 kPa
	15" x 20" x 1"	9805			
	10" x 20" x 1"	9806	Dust-Holding Capacity	95 gms/ft ² (1023 gms/m ²)	67 gms/ft ² (721 gms/m ²)
MIST ELIMINATOR UL 900 Classified Rated Velocity 150-650 FPM (0.76-4.58 m/s) Optimum Velocity 350-520 FPM (1.78-2.64 m/s)			2" EZ Klean Filters		
	20" x 25" x 2"	9151		At 350 fpm (1.78 m/s)	At 520 fpm (2.64 m/s)
	20" x 20" x 2"	9152			
	16" x 25" x 2"	9153	Average Arrestance	72%	68%
	16" x 20" x 2"	9154	Clean Resistance	0.07" w.c. 0.018 kPa	0.14" w.c. 0.035 kPa
	15" x 20" x 2"	9155			
	10" x 20" x 2"	9156	Dust-Holding Capacity	130 gms/ft ² (1399 gms/m ²)	91 gms/ft ² (980 gms/m ²)
	24" x 24" x 2"	9157			
INDUSTRIAL EZ KLEEN UL 900 Classified Rated Velocity 150-900 FPM (0.76-4.58 m/s) Optimum Velocity 350-520 FPM (1.78-2.64 m/s)			2" Industrial Filters		
	20" x 25" x 2"	901		At 350 fpm (1.78 m/s)	At 520 fpm (2.64 m/s)
	20" x 20" x 2"	902			
	16" x 25" x 2"	903	Average Arrestance	67%	64%
	16" x 20" x 2"	904	Clean Resistance	0.05" w.c. 0.013 kPa	0.10" w.c. 0.025 kPa
	15" x 20" x 2"	905			
	10" x 20" x 2"	906	Dust-Holding Capacity	143 gms/ft ² (1539 gms/m ²)	117 gms/ft ² (1259 gms/m ²)
TRIM-TO- SIZE EZ KLEEN UL 900 Classified				1/4" Trim-To-Size*	5/8" Trim-To-Size*
	15" x 24" x 1/4"	9200		At 350 fpm (1.78 m/s)	At 350 fpm (1.78 m/s)
	40" x 64" x 1/4"	9250	Average Arrestance	61%	54%
	40" x 64" x 5/8"	9251	Clean Resistance	0.07" w.c. 0.018 kPa	0.045" w.c. 0.011 kPa
	40" x 50" x 1/4"	9260			
	40" x 50" x 5/8"	9261	Dust-Holding Capacity	100 gms/ft ² (1075 gms/m ²)	95 gms/ft ² (1023 gms/m ²)
MADE-TO-ORDER EZ KLEEN UL 900 Classified Minimum quantities may apply.			EZ Klean Filters 3/32", 3/8", 1/2"		
			3/32", 3/8", 1/2" Nominal Frame Thickness	At 350 fpm (1.78 m/s)	
			Average Arrestance	64%	
			Clean Resistance	0.06" w.c. 0.016 kPa	
			Dust-Holding Capacity	44 gms/ft ² (474 gms/m ²)	